




P2043/01/R0/LIVINGSTON BARBOUR STORE

arlico

LIGHTING PROPOSAL

Proudly prepared for



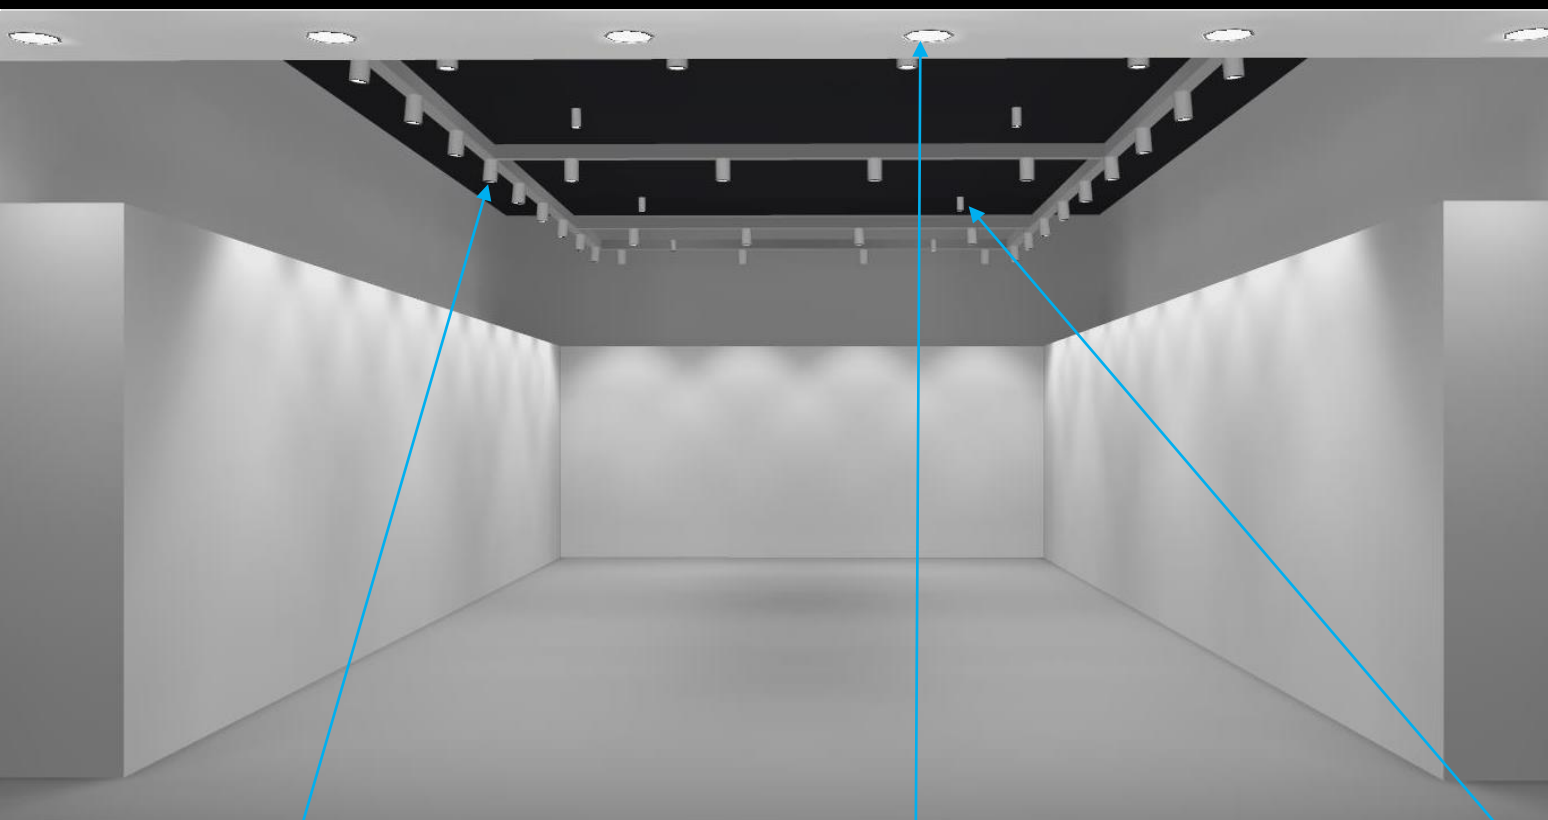

STORE OPTION 1

3D Visual



T1

TERES

Track-mounted spotlight, 110mm (diameter), 2,790Lm (delivered), 25W, 700mA, 3000K, Ra90+, powder coated black (matt) finish, RAL 9005, non-dimmable, non-emergency, 70° beam angle



A2

HAL ESSENTIAL

LED downlight designed specifically for retrofit applications, 210mm (diameter), 2,100Lm (delivered), 20cW, 3000K, Ra80+, white finish, non-dimmable, non-emergency




P

SP.P

Decorative industrial pendant, with a dome shade ø440mm in brass material, E27 bulb holder, Pewter finish combined with an inner brass finish, 1m black round fabric flex included.



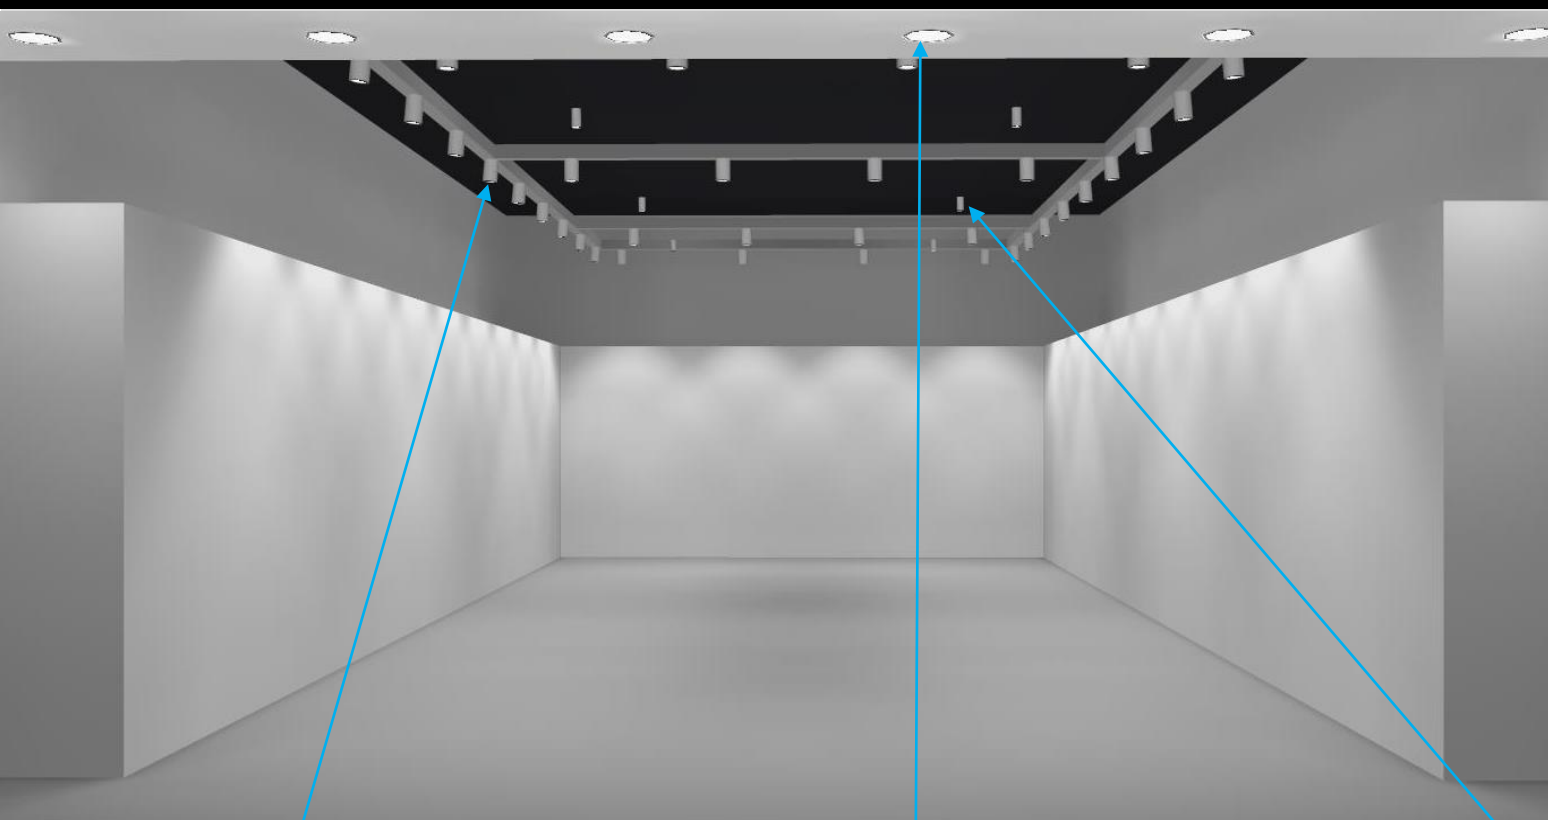

STORE OPTION 2

3D Visual



T1

TERES

Track-mounted spotlight, 110mm (diameter), 2,790Lm (delivered), 25W, 700mA, 3000K, Ra90+, powder coated black (matt) finish, RAL 9005, non-dimmable, non-emergency, 70° beam angle

D

**HAL PRO**

Recessed LED down lighter, 200mm (diameter), 3,236Lm (delivered), 35cW, 950mA, 3000K, Ra90+, powder coated signal white finish, RAL 9003, non-dimmable, non-emergency, 40° beam angle. Ideal for environments where a high colour rendering is required.

P

**SP.P**


Decorative industrial pendant, with a dome shade ø440mm in brass material, E27 bulb holder, Pewter finish combined with an inner brass finish, 1m black round fabric flex included.

Brand logo above the displays highlighted

STORE OPTION 3

3D Visual

Q



QI

Linear integrated solution to standard electrified track, 1210mm (length), 2,153Lm (delivered), 24cW, 3000K, Ra90+, powder coated graphite black (matt) finish, RAL 9011, non-dimmable, asymmetrical distribution

T1



TERES

Track-mounted spotlight, 110mm (diameter), 2,790Lm (delivered), 25W, 700mA, 3000K, Ra90+, powder coated black (matt) finish, RAL 9005, non-dimmable, non-emergency, 70° beam angle

D



HAL PRO

Recessed LED down lighter, 200mm (diameter), 4,992Lm (delivered), 52cW, 950mA, 3000K, Ra90+, powder coated signal white finish, RAL 9003, non-dimmable, non-emergency, 40° beam angle. Ideal for environments where a high colour rendering is required.

P



SP.P

Decorative industrial pendant, with a dome shade ø440mm in brass material, E27 bulb holder, Pewter finish combined with an inner brass finish, 1m black round fabric flex included.



P2043/01/R0/LIVINGSTON BARBOUR STORE

THANK YOU

Contact

HEAD OFFICE

+44(0)23 8202 2100

Units 18 Vancouver Wharf, Hazel Road Soton, SO19 7BN

LONDON SHOWROOM

+44(0)20 3375 8192

111 Charterhouse St, London, EC1M 6AW

www.arli.co

arlico